




# WIP

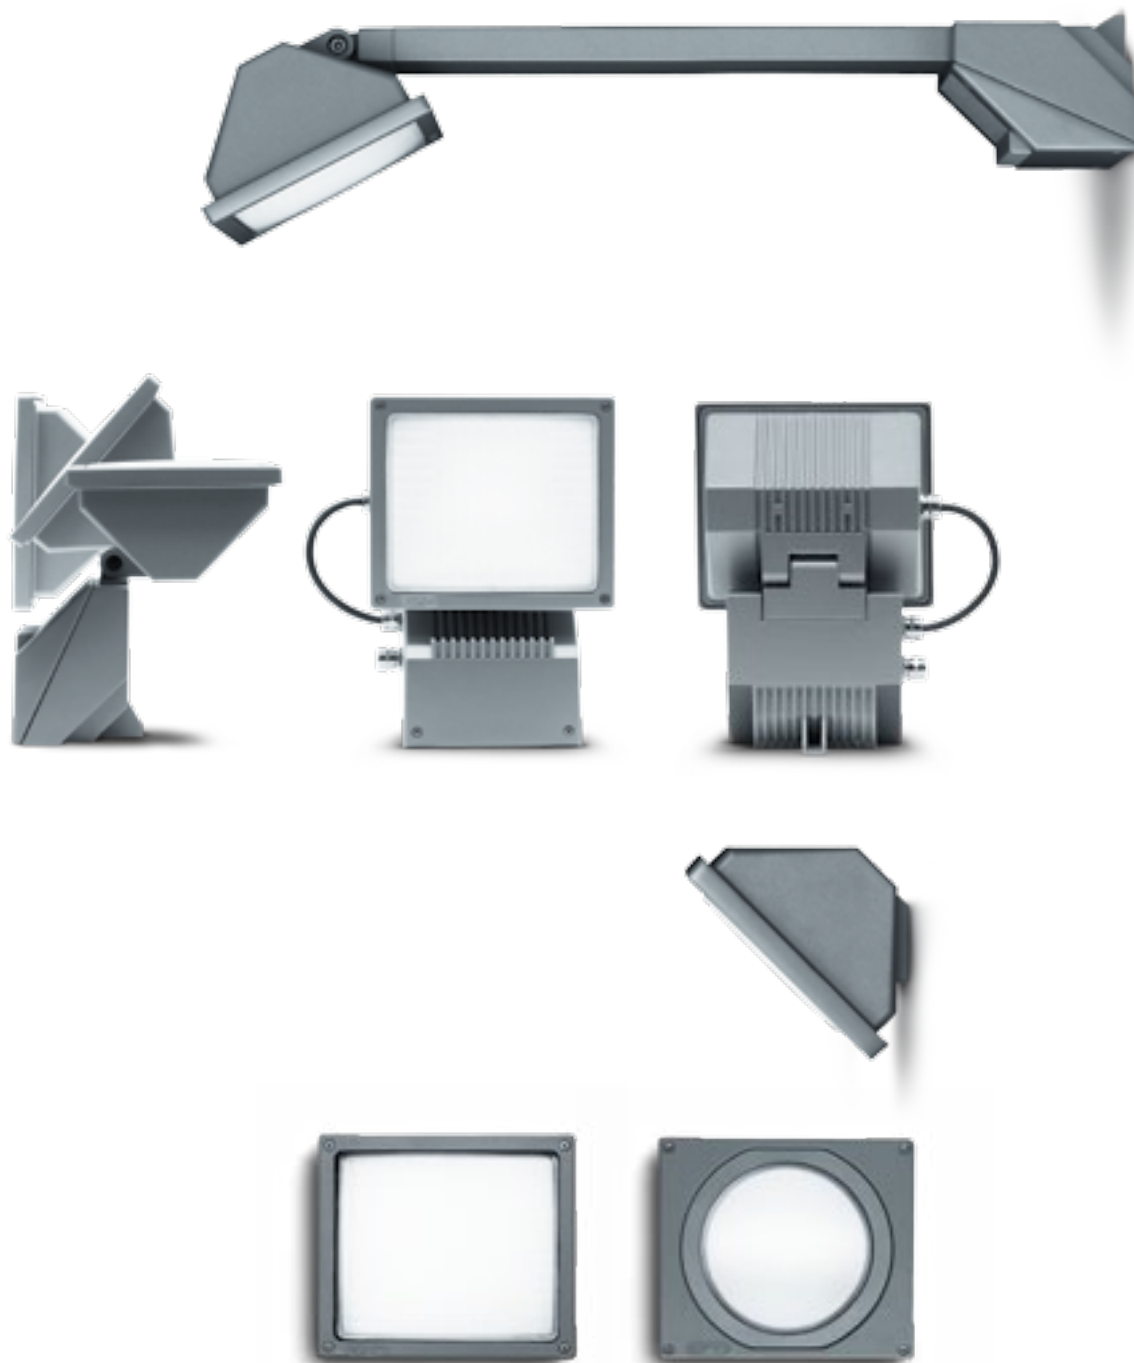

Die-cast EN AB-47100 aluminium housing (copper free) with high corrosion resistance.  
 Toughened acid etched glass diffuser.  
 Faceted aluminium reflector.  
 Stainless steel screws.  
 Double cable entries.  
 Double cable entries with PG13,5 cable glands for WIP FLOODLIGHT.  
 Dutral gaskets.

**Double powdered paint** in 3 step process:  
 \_ surface treatment containing ceramic nano particles (Bonderite);  
 \_ epoxy primer paint;  
 \_ polyester powder paint with high resistance against UV rays and harsh weather conditions.

**Lamp not included.**

IP65

CLASS I




Public space, Brescia, Italy © Gianattilio Valli

**COLOURS:**

- Black (code 09)
- Aluminium grey (code 14)



WIP APPLIQUE fittings with ROUND OPTIC can use the accessory protective grill.





**S.4344**

**PROTECTIVE GRILL**


Colours:  
 black (code 09)  
 aluminium grey (code 14)

METAL HALIDE SODIUM



**S.4316** and **S.4326**, for metal halide lamp HIT-DE 70W Rx7s and **S.4318** and **S.4328**, for metal halide lamp HIT-DE 150W Rx7s can also use high pressure sodium lamps HST-DE 70W or 150W Rx7s working with the same gear.




RECTANGULAR OPTIC




**S.4309**



For lamp TC-D 18W G24d-2 1200lm  
Rated luminaire luminous flux 324lm  
Rated input power 22W

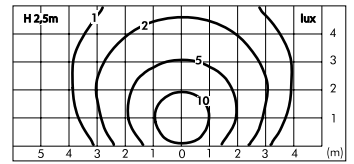




ROUND OPTIC




**S.4349**



For lamp TC-D 18W G24d-2 1200lm  
Rated luminaire luminous flux 228lm  
Rated input power 22W

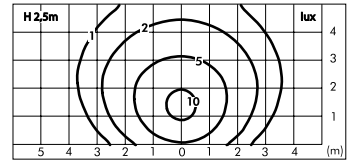





### S.4311



For lamp QT-DE12 300W R7s 5000lm  
Rated luminaire luminous flux 3600lm  
Rated input power 300W




h(m)	74°	86°	E(lx)
	ØCo(m)	ØC90(m)	
2	3.05	3.69	500
4	6.09	7.38	125
6	9.14	11.07	56
8	12.19	14.76	31
10	15.24	18.46	20





### S.4319



For lamp TC-T 26W Gx24d-3 1800lm  
Rated luminaire luminous flux 702lm  
Rated input power 31W




h(m)	88°	94°	E(lx)
	ØCo(m)	ØC90(m)	
2	3.89	4.23	77
4	7.78	8.46	19
6	11.67	12.69	9
8	15.56	18.92	5
10	19.45	21.15	3




### S.4316



For lamp HIT-DE 70W Rx7s 6500lm  
Rated luminaire luminous flux 4680lm  
Rated input power 84W




h(m)	74°	86°	E(lx)
	ØCo(m)	ØC90(m)	
2	3.05	3.69	650
4	6.09	7.38	163
6	9.14	11.07	72
8	12.19	14.76	41
10	15.24	18.46	26





### S.4318



For lamp HIT-DE 150W Rx7s 13250lm  
Rated luminaire luminous flux 8215lm  
Rated input power 149W




h(m)	70°	82°	E(lx)
	ØCo(m)	ØC90(m)	
2	2.83	3.51	996
4	5.66	7.03	249
6	8.50	10.51	111
8	11.33	14.06	62
10	14.16	17.57	40




### S.4321



For lamp QT-DE12 300W R7s 5000lm  
Rated luminaire luminous flux 3600lm  
Rated input power 300W




h(m)	74°	86°	E(lx)
	ØCo(m)	ØC90(m)	
2	3.05	3.69	500
4	6.09	7.38	125
6	9.14	11.07	56
8	12.19	14.76	31
10	15.24	18.46	20





### S.4326



For lamp HIT-DE 70W Rx7s 6500lm  
Rated luminaire luminous flux 4680lm  
Rated input power 84W




h(m)	74°	86°	E(lx)
	ØCo(m)	ØC90(m)	
2	3.05	3.69	650
4	6.09	7.38	163
6	9.14	11.07	72
8	12.19	14.76	41
10	15.24	18.46	26



### S.4328



For lamp HIT-DE 150W Rx7s 13250lm  
Rated luminaire luminous flux 8215lm  
Rated input power 149W



h(m)	70°	82°	E(lx)
	ØCo(m)	ØC90(m)	
2	2.83	3.51	996
4	5.66	7.03	249
6	8.50	10.51	111
8	11.33	14.06	62
10	14.16	17.57	40

