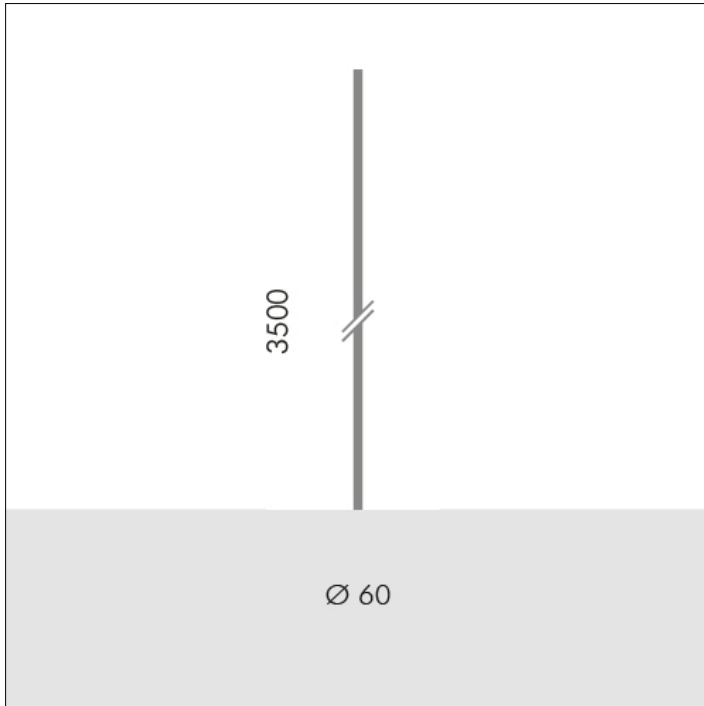


## ZUBEHÖRTEIL

**S.2807  
ZYLINDRISCHER MAST H 3,5m Ø60mm**

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 4,5mm in thickness, total length 3,50m, in aluminium EN AW6060.

Suitable for ground recessed installation to a cement base 0,50m ( Accessory S.2808 ) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

**Für eine korrekte Installation des S.2807-Masts wird dringend empfohlen, das Flanschzubehör S.2808 zu vergraben**

Zubehör in folgenden Farben erhältlich: Dunkelgrün (cod.07), Schwarz (cod.09), Bronze (cod.20), Anthrazitgrau (cod.24)