
ACCESSORY

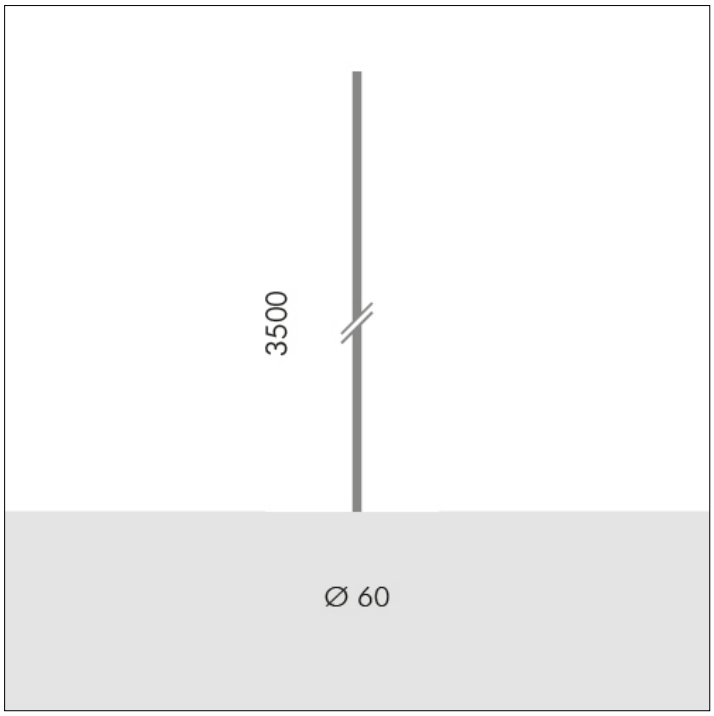

S.2807
H 3,5m Ø60mm CYLINDRICAL POLE

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 4,5mm in thickness, total length 3,50m, in aluminium EN AW6060.

Suitable for ground recessed installation to a cement base 0,50m (Accessory S.2808) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

IT IS STRONGLY RECOMMENDED TO BURY THE S.2808 FLANGE ACCESSORY FOR A CORRECT INSTALLATION OF THE S.2807 POLE
Accessory available in the following colors: Dark green (cod.07), Black (cod.09), Burnished bronze (cod.20), Anthracite grey (cod.24)

Exclusive distributor for USA
Sistemalux Inc. - 9320 Saint Laurent, Montréal (Qc) - Canada QC H2N 1N7 - Tel.: +1 (514) 523-1339

The present technical data sheet and all the information contained is property of SIMES S.p.A. All rights reserved.
We reserve the right to change specifications without prior written notice.