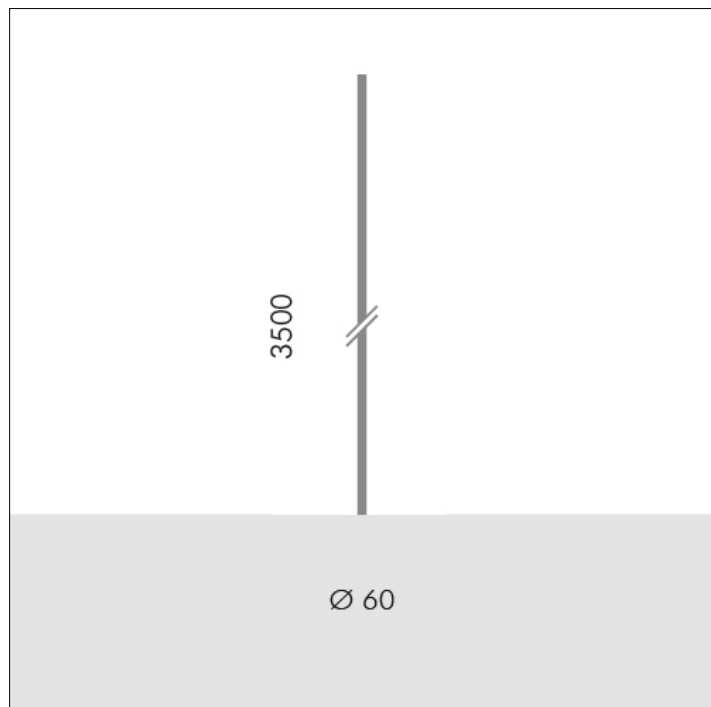


## ACCESSOIRE


**S.2807**  
**POTEAU CYLINDRIQUE H 3,5m Ø60mm**

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 60mm, 4,5mm in thickness, total length 3,50m, in aluminium EN AW6060.

Suitable for ground recessed installation to a cement base 0,50m ( Accessory S.2808 ) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

**IL EST FORTEMENT RECOMMANDÉ D'ENTERER**  
**L'ACCESSOIRE BRIDE S.2808 POUR UNE INSTALLATION**  
**CORRECTE DU POTEAU S.2807**

Accessoire disponible dans les couleurs suivantes: Vert foncé (cod.07), Noir (cod.09), Bronze bruni (cod.20), Gris anthracite (cod.24)