

www.simes.it/streamline

Streamline is a family of linear fixed and tiltable floodlights for wall and ground application. The fixed version ensures a grazing lighting effect and it's perfect as facade lighting and wall. It can be tilted from 0°, to -5°, till -10° with an asymmetric light distribution. Streamline in the 180° tiltable version is offered with Spot 12°, Flood 31° and asymmetric optic, for a precise light distribution.

TECHNICAL DESCRIPTION

Die-cast aluminium housing with high corrosion resistance. Clear toughened glass diffuser. Stainless steel A4 screws. Silicone gaskets. Double powder paint.

PROJECTOR

Luminaire supplied with 1,5m neoprene H05RN-F cable.

WALL MOUNTED

Luminaire with one single cable entry and grommet. Luminaire with double cable entry and grommet version available on request with surcharge.

REGISTERED DESIGN

PROTECTION CLASS
IP65

ISOLATION CLASS
CLASS I Ⓢ

MECHANICAL RESISTANCE
IK 07


COLOURS

.14 Aluminium Grey

.24 Anthracite Grey





Ministreamline





S.1247W Asimmetrical beam with lenses
 LED MODULE **3000K** CRI80 3192lm 20,5W
 (on request 2700K CRI80 3032lm)
 (on request 4000K CRI80 3778lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable


Ministreamline



S.1240W Asimmetrical beam with lenses
 LED MODULE **3000K** CRI80 3192lm 20,5W
 (on request 2700K CRI80 3032lm)
 (on request 4000K CRI80 3778lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable





S.1245W Spot beam with lenses
 LED MODULE **3000K** CRI90 3900lm 32,6W
 (on request 2700K CRI90 3600lm)
 (on request 4000K CRI80 4800lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1246W Flood beam with lenses
 LED MODULE **3000K** CRI90 3900lm 32,6W
 (on request 2700K CRI90 3600lm)
 (on request 4000K CRI80 4800lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable


Beam lenses available on request
 with no surcharge: 66° and 10°x40°

Streamline

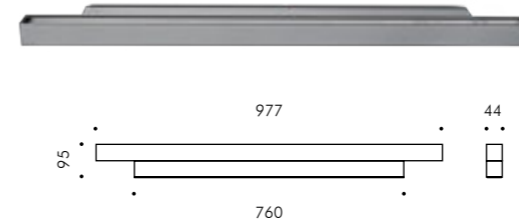


S.1250W Asimmetrical beam with lenses
 LED MODULE **3000K** CRI80 8400lm 54W
 (on request 2700K CRI80 6840lm)
 (on request 4000K CRI80 9000lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable


Streamline



S.1257W Asimmetrical beam with lenses
 LED MODULE **3000K** CRI80 8400lm 54W
 (on request 2700K CRI80 6840lm)
 (on request 4000K CRI80 9000lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1255W Spot beam with lenses
 LED MODULE **3000K** CRI90 9360lm 78,1W
 (on request 2700K CRI90 8640lm)
 (on request 4000K CRI80 11520lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable



S.1256W Flood beam with lenses
 LED MODULE **3000K** CRI90 9360lm 78,1W
 (on request 2700K CRI90 8640lm)
 (on request 4000K CRI80 11520lm)
 220V-240Vac 50/60Hz
 ON/OFF Not Dimmable

Beam lenses available on request
 with no surcharge: 66° and 10°x40°

