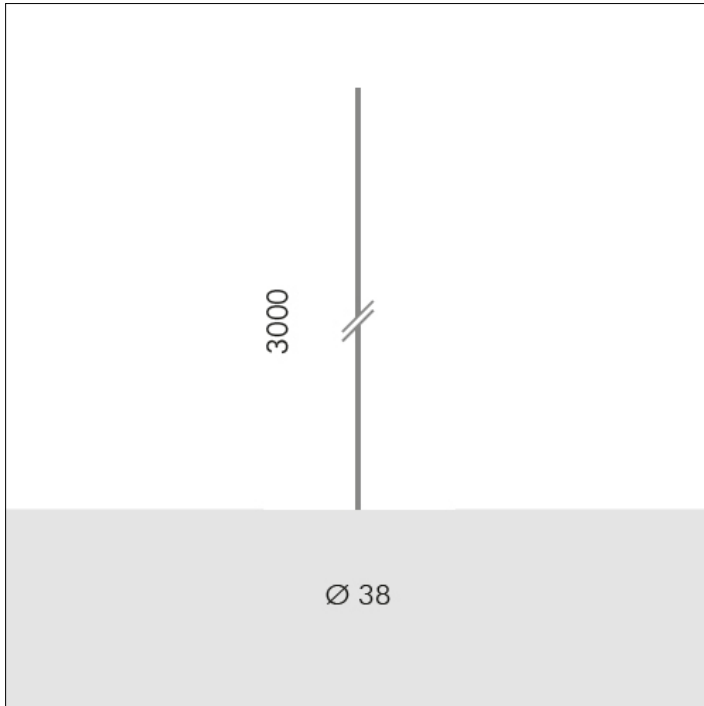


## ACCESSORY

**S.2805  
H 3,0m Ø38mm CYLINDRICAL POLE**

Cylindrical shaped poles consisting of: straight circular section shaft, Ø 38mm, 4mm in thickness, total length 3,00m, in aluminium EN AW6060.

Suitable for ground recessed installation to a cement base 0,50m ( Accessory S.2806 ) : Suggested reinforced concrete footstall dimension 1,0m x 1,0m h 0,7m. Footstall dimension can be calculated according to your country norms and ground properties.

The surface protection treatment is done through hot dip galvanization.

Painting Process: PRE POLYMERIZATION a process of introducing an epoxy primer with excellent characteristics to the paint which also offers very high resistance to oxidation due to its Zinc content. POLYMERIZATION a process with the application of polyester powder with high resistance against UV rays and harsh weather conditions. Resistance test protection for Marine applications for 1500h.

**IT IS STRONGLY RECOMMENDED TO BURY THE S.2806 FLANGE ACCESSORY FOR A CORRECT INSTALLATION OF THE S.2805 POLE**

Accessory available in the following colors: Dark green (cod.07), Burnished bronze (cod.20), Anthracite grey (cod.24)